

4dBi 281MHz Omni Fiberglass Antenna




Electrical Specifications 电性指标

Part Number 料号	CWBLG200V4TF2
Frequency Range 频率范围	281MHz
Bandwidth 带宽	/
Peak Gain 峰值增益	4dBi
Radiation Direction 辐射方向	Omnidirectional
Polarization 极化方式	Vertical
Electrical Downtilt 电下倾角	/
Half Power Beamwidths 半功率波瓣宽度	/
First Upper Sidelobe Suppression 第一上旁瓣抑制	/
Front-to-rear ratio 前后比	/
Impedance 输入阻抗	50Ω
VSWR 电压驻波比	≤2.0
Maximum Power 最大功率	150W
Lightning Protection 雷电保护	DC Grounding


Mechanical Specifications 机械性能

Connector Type 接头类型	N Female
Connector Position 接头位置	Bottom
Cable type 线材类型	/
Antenna Size 天线尺寸	2000*32MM
Antenna Weight 天线重量	/
Radome Material 外罩材料	Fiberglass
Radome Colour 外罩颜色	GY06 Military Green
Mechanically Adjustable Tilt Angle 机械可调倾角	/
Temperature Range 温度	-40-85℃
Extreme Wind Speed 极限风速	60m/s
Pole Diameter 抱杆直径	30-50MM
Mounting Method 安装方式	Pole Mount
Mounting Model 安装件型号	Used in magnetic and other mounting bases
Environmental Standards 环保标准	ROHS/REACH



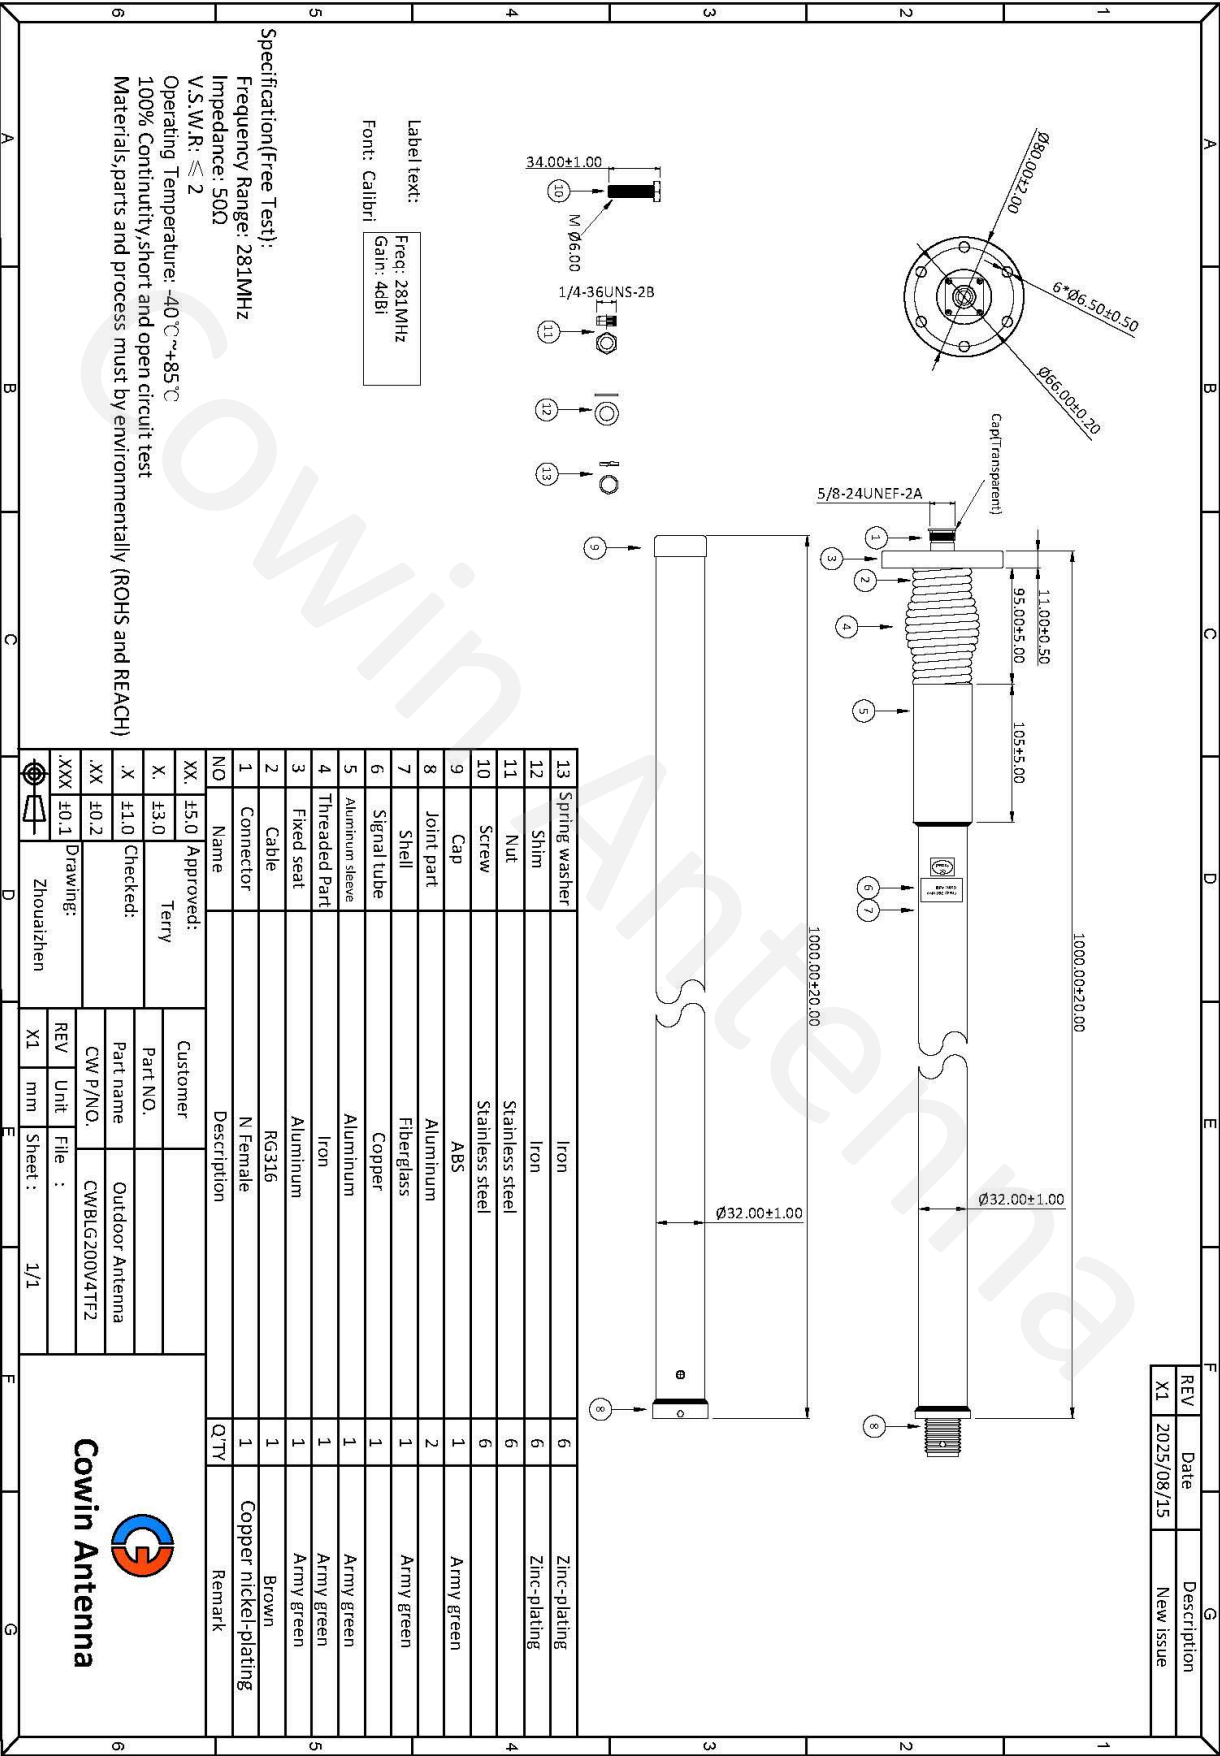

V.S.W.R

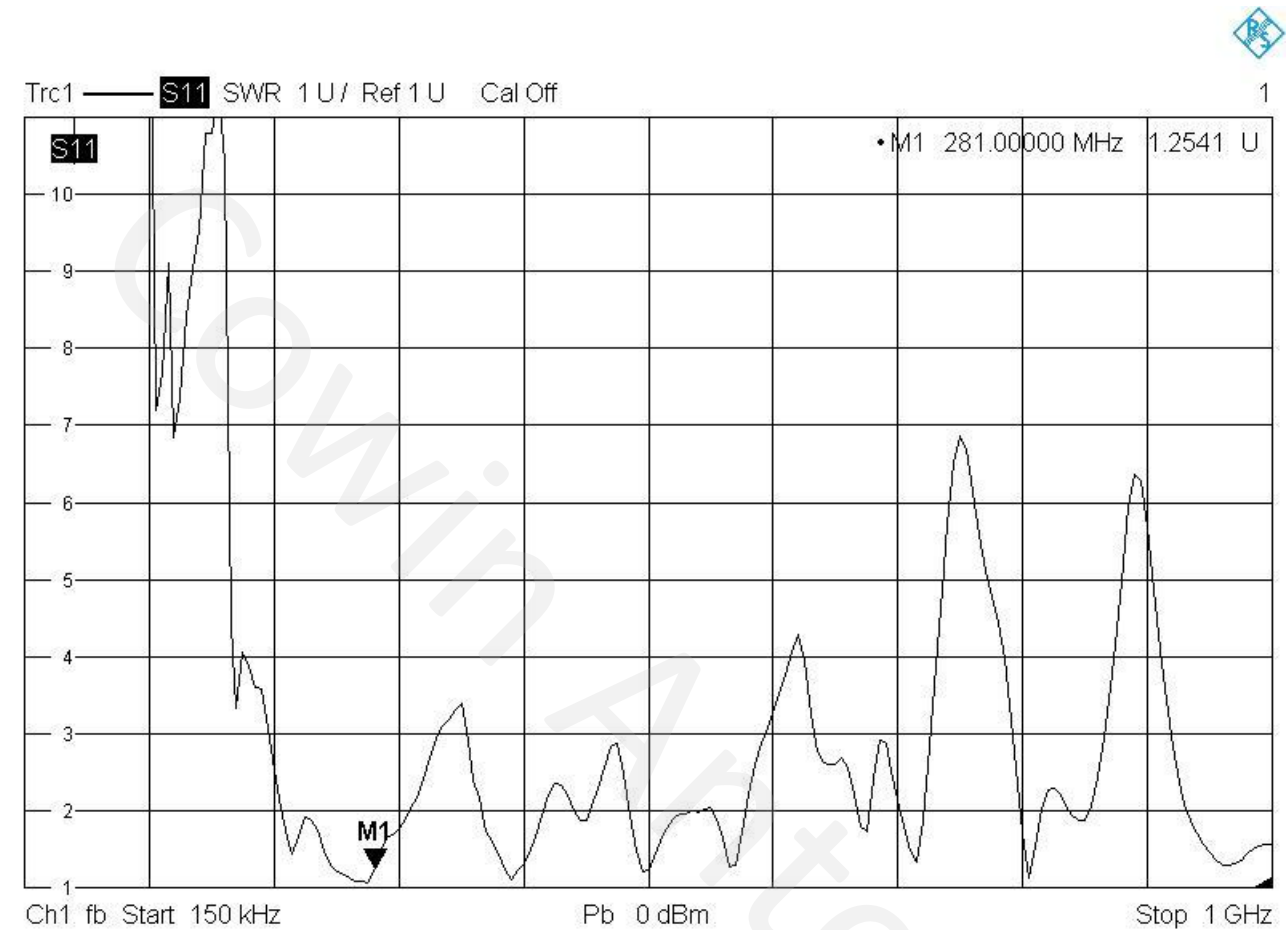

8/16/2025, 3:03 PM